

17" Cloud Monitor with Optional Touchscreen

PCoIP Zero Client Monitor

CP17BH

Configuration	CP17BH
LCD Display	17" TFT active matrix panel
Pixel Pitch	0.264 (H) x 0.264 (V) mm
Max. Resolution	SXGA 1280 x 1024
Contrast Ratio	1000:1 (Typ.) <small>w/o sensor or glass</small>
Brightness	350 cd/m ² (Typ.) <small>w/o sensor or glass</small>
Response Time (Tr+Tf)	5 ms (Typ.)
Display Color	16.7M
Effective Display Area	337.9 (H) x 270.3 (V) mm
Viewing Angle (CR ≥ 10)	170°(H) x 160°(V) (Typ.) <small>w/o sensor or glass</small>
Lamp Life (hr) / Backlight	50,000 (Typ.) / CCFL
Stand Base	Tilt down : -5° , Tilt up : +90°
System	PCoIP Processor Memory DDR3 TBDMB Operating System: None
I/O	
Video in	D-Sub15 pin (VGA) x1
Video out	DVIX1, up to 2560x1600
Audio System	Headphone Out x1 Microphone In x1 Line In x1
Ethernet	RJ45 x1 / WiFi by USB dongle
USB 2.0	3 ports
Touch sensor	TBD
Key Control	Power on/off, with LED, Menu, Select, Adjustment (+, -)
Power	Universal Power Adapter Input AC 100-240V, 50-60 Hz Output DC 12V / TBD A, TBD W
Operating Condition	Temperature 0°C - 40°C (32°F - 104°F) Humidity 10% - 90% (no condensation) Altitude To 10,000 feet
Storage Condition	Temperature -20°C - 60°C (-4°F - 140°F) Humidity 10% - 90% (no condensation)
Dimensions (WxHxD)	392.0 x 381.5 x 180.0 mm
Carton Dimensions (WxHxD)	452.0 x 461.0 x 228.0 mm
Weight (Net)	6.5 kg
Certification	CE, FCC, UL, C-UL

* Specifications are subject to change without notice.

Features

- ⊙ The GVision CP17BH utilizes a PCoIP® (PC-over-IP) Chipset and VMware to deliver a powerful and secure virtual computing solution.
- ⊙ High contrast color TFT LCD display support resolution up to 1024 x 768. Compatible with IBM, VGA, VESA standards.
- ⊙ Support DDC 1/2B for Plug & Play compatibility.
- ⊙ Advanced OSD control for picture quality adjustment.
- ⊙ Auto detects multi-signals input.
- ⊙ Optional front panel sealed to resist dust and splashes.
 - AG / AR tempered glass : IP54
 - Resistive / Capacitive Touch Panel : IP54
- ⊙ VESA mounting. RoHS Compliance.
- ⊙ Use PCoIP client processor.
- ⊙ Stateless zero client, no data storage.
- ⊙ Enable server-based remote imaging.
- ⊙ WAN optimizations built into the protocol.


Optional Accessories

- ⊙ Anti-Glare / Anti-Reflective tempered glass (MOQ) .
- ⊙ Capacitive Touch Solution (MOQ) .
- ⊙ Choice of black , beige or white housing .

(Project Base)

- ⊙ Cable Management Stand .
- ⊙ USB 2.0 Hub .

I / O Port

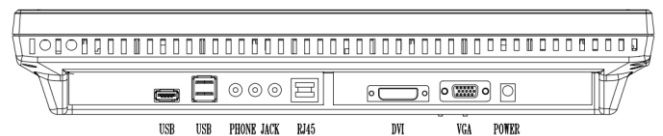

Mechanical Drawing

Unit : mm

