

W5FX

15" Open Frame High Bright LCD Monitor

PRELIMINARY Product Specifications


SPECIFICATIONS		W5FX
LCD Display Area		15.0" TFT Active Matrix Panel
Display Size (HxV)		12"x9" (304x228mm)
Pixel Pitch (HxV)		0.297x0.297mm
Max. Resolution		XGA 1024x768
Contrast Ratio		350:1 (typical)
Brightness		1,200 cd/m ² (typical)
Response Time		25 ms
Display Color		16M
Viewing Angle	L/R	120°
	U/D	100°
Input Signal	Video	RGB analog 0.7Vpeak to peak
	Sync	TTL Positive or Negative
Display Mode		VGA 720x400 (70 Hz) VGA 640x480 (60/70/72/75 Hz) SVGA 800x600 (56/60/72/75 Hz) XGA 1024x768 (60/70/75 Hz)
Signal Connector	Analog	15 pin D-sub
	Digital	24 -pin DVI (optional)
Front Control		Power on/off with LED, Menu, Select, Adjustment (+,-)
Plug and Play		DDC1/2B compatible
Power Adapter		Input AC 100~240V, 50~60Hz; Output DC 12V / 5A
Operating Conditions	Temperature	41°F ~ 95°F (5°C ~ 35°C)
	Humidity	20% ~ 80% (no condensation)
	Altitude	To 10,000 Feet
Storage Conditions	Temperature	-4°F ~ 140°F (20°C ~ 60°C)
	Humidity	10% ~ 90% (no condensation)
Audio System	Speakers	1W / Per Channel
	Connector	Audio R/L (RCA jack) input unit (optional)
Video-In		S-Video & Composite Video (optional)
Dimensions (HxWxD)		12.8"x13.5"x6.07" (325x342x154mm)
Weight (Net)		TBD
Optional Module		MA-Analog, MB-Dual Analog/Digital, ME-Dual and Video-In
Certifications		TBD

Specifications are subject to change without notice.



Catch the wave of the future!

20532 Crescent Bay Dr. Suite 104
 Lake Forest, CA 92630
 Ph: 949-586-3338 Fax: 949-586-3398
 www.gvision-usa.com

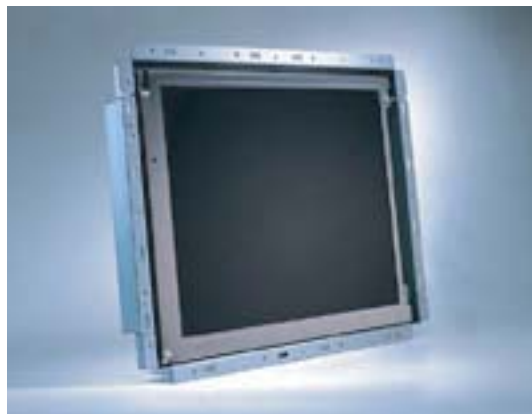

Preliminary 10/03