


DESKTOP



Part	P10PS-JA-452G (or 453G)	P12DS-LA-4620 (or 4630)	L15AX-JA-452G (or 453G)	V15DX-AB-459G	P15BX-AB-459G	P17BH-AB-459G	P19BH-AB-459G
LCD Display	10.4"	12.1"	15"	15"	15"	17"	19"
Bezel Color	Black	Black or Beige (2620/2630)	Black	Black	Black	Black	Black
Max Resolution	SVGA 800 x 600	SVGA 800 x 600	XGA 1024 x 768	XGA 1024 x 768	XGA 1024 x 768	SXGA 1280 x 1024	SXGA 1280 x 1024
Brightness	200 cd/m2 (typical)	360 cd/m2 (typical)	200 cd/m2 (typical)	250 cd/m2 (typical)	200 cd/m2 (typical)	280 cd/m2 (typical)	320 cd/m2 (typical)
Contrast Ratio	350:1 (typical)	600:1 (typical)	600:1 (typical)	600:1 (typical)	600:1 (typical)	900:1 (typical)	900:1 (typical)
Response Time	25ms (typical)	35ms (typical)	8 ms (typical)	8 ms (typical)	8ms (typical)	5ms (typical)	5ms (typical)
Viewing Angle	160°(H) x 140°(V) (typical)	160°(H) x 140°(V) (typical)	140°(H) x 130°(V) (typical)	160°(H) x 160°(V) (typical)	140°(H) x 130°(V) (typical)	170°(H) x 160°(V) (typical)	170°(H) x 160°(V) (typical)
Base	Photo Frame	Pedestal w/ 90 Degree Tilt	Photo Frame	Pedestal w/ 90 Degree Tilt	Pedestal w/ 90 Degree Tilt	Pedestal w/ 90 Degree Tilt	Pedestal w/ 90 Degree Tilt
Video	VGA	VGA	VGA	VGA + DVI	VGA + DVI	VGA + DVI	VGA + DVI
Audio	1W per channel	NA	1W per channel	N/A	1W per channel	1W per channel	1W per channel
Touch Screen	Resistive - Serial (or USB)	Resistive - Serial (or USB)	Resistive - Serial (or USB)	Resistive - Dual (Serial & USB)	Resistive - Dual (Serial & USB)	Resistive - Dual (Serial & USB)	Resistive - Dual (Serial & USB)
Power	External Adapter (DC Input)	External Adapter (DC Input)	External Adapter (DC Input)	External Adapter (DC Input)	External Adapter (DC Input)	Internal Power (AC Input)	Internal Power (AC Input)
Certification	CE, FCC, UL, C-UL	CE, FCC, UL, C-UL, CB	CE, FCC, UL, C-UL, CB	CE, FCC, UL, C-UL, CB	CE, FCC, UL, C-UL, TUV	CE, FCC, UL, C-UL, TUV, CB	CE, FCC, UL, C-UL, TUV
Mounting	VESA 75mm	VESA 75mm	VESA 75mm	VESA 75mm	VESA 75mm	VESA 100mm	VESA 100mm
Other				2 x USB Ports (Passthrough)*			





KIOSK

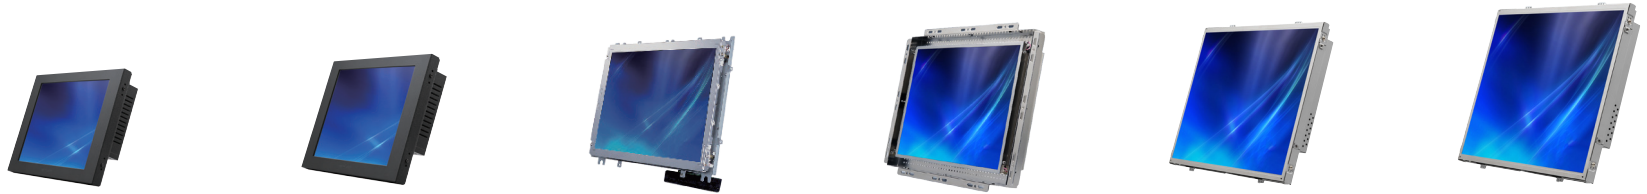

Part #	K08AS-CA-0620 (or 0630)	K10AS-CB-0630	K12TX-CA-0620 (or 0630)	K15TX-CB-0620 (or 0630)	K17BH-FB-0690	K19BH-FB-0690
LCD Display	8.4"	10.4"	12.1"	15"	17"	19"
Bezel Color	Black	Black	Open Frame	Open Frame	Open Frame	Open Frame
Max. Resolution	SVGA 800 x 600	SVGA 800 x 600	XGA 1024 x 768	XGA 1024 x 768	SXGA 1280 x 1024	SXGA 1280 x 1024
Brightness	360 cd/m2 (typical)	200 cd/m2 (typical)	360 cd/m2 (typical)	200 cd/m2 (typical)	240 cd/m2 (typical)	240 cd/m2 (typical)
Contrast Ratio	525:1 (typical)	350:1 (typical)	600:1 (typical)	600:1 (typical)	700:1 (typical)	700:1 (typical)
Response Time	30ms (typical)	25ms (typical)	35 ms (typical)	8ms (typical)	5ms (typical)	5ms (typical)
Viewing Angle	160°(H) x 140°(V) (typical)	130°(H) x 100°(V) (typical)	160°(H) x 160°(V) (typical)	140°(H) x 125°(V) (typical)	160°(H) x 160°(V) (typical)	160°(H) x 160°(V) (typical)
Base	No Stand	No Stand	No Stand	No Stand	No Stand	No Stand
Video	VGA	VGA + DVI	VGA	VGA + DVI	VGA + DVI	VGA + DVI
Audio	NA	NA	NA	NA	NA	NA
Touch Screen	Resistive - Serial (or USB)	Resistive - USB	Resistive - Serial (or USB)	Resistive - Serial (or USB)	Resistive - Dual (Serial & USB)	Resistive - Dual (Serial & USB)
Power	External Adapter (DC Input)	External Adapter (DC Input)	External Adapter (DC Input)	External Adapter (DC Input)	External Adapter (DC Input)	External Adapter (DC Input)
Certification	CE, FCC	CE, FCC	CE, FCC	CE, FCC	CE, FCC	CE, FCC
Mounting	VESA 75mm	VESA 75mm	VESA 75mm	VESA 75mm	VESA 100mm	VESA 100mm

All products above available without touch
 Certain models available with Capacitive or Surface Acoustical Wave (SAW) touch screens. Please call for details.

LARGE FORMAT TOUCH DISPLAYS



Part #	DS46AD-OO-45LG	DS55AD-OO-45LG	DS65AD-OO-45LG	DS70AD-OO-45LG	DS84AI-OO-45LG
Panel Size	46"	55"	65"	70"	84"
Native Resolution	1920 x 1080				3840 x 2160
Brightness	400 cd/2	380 cd/2	360 cd/2	350 cd/2	350 cd/2
Contrast	4000:1				1600:1
Response Time	6.5ms		8ms	4-6ms	5ms
Viewing Angle	1780/ 1780				
Backlight Unit	LED				
Backlight Life	30,000 Hours				50,000 Hours
Touch Technology	SLW 6-point touch				
Input Voltage	AC100~240V 50/60Hz				
Standby Power	<0.5 Watts				
Power Consumption	<72 Watts	<140 Watts	< 235 Watts	<200 Watts	420 Watts
Operating Temp.	0-500C				
Operating Humidity	10-90% RH				
Input Connectors	VGA x 1; DVI x 1; HDMI x 2; USB x 2; Audio In; Mini Din (YPbPr, Composite, Audio)				
Output Connector	VGA x 1; Audio Out				
Screen Control	RS-232; RS-485; Remote Handset				
Ambient Detection	Auto Ambient Light Detection				
Tempered Glass	4mm		5mm		
Dimensions(WxHxD) mm	1117x683x109	1300x790x104	1550x927x108	1621x970x112	1960x1157x115
Weight (kgs)	35	43	81	78	101
Speakers	10W x 2				

SUPER WIDE LED DISPLAYS



Part #	S29AF-OB-400G	S38AF-OB400G
Display Size	28.9"	38"
Dimension Outline (in.)	28.9 (W) x 10.11 (H) x .86 (D)	38 (W) x 11.73 (H) x .94 (D)
Active Area (in.)	27.5 (W) x 8.4 (H)	36.62 (W) x 10.29 (H)
Resolution	1920 x 540	1920 x 540
Display Colors	8-Bit - 16.7M	8-Bit - 16.7M
Brightness (cd/m2)	700 / 1000	550
Contrast Ratio	3000:1	3000:1
Technology	TFT Active Matrix w/ Super MVA technology	TFT Active Matrix w/ Super MVA technology
Aspect Ratio	16:5	16:4.5
View Angle	178 (H)(V)	176 (H)(V)
Back Light Type	LED	LED
Power Consumption	< 60	< 120
Weight (lbs)	6.8	17.85

Super Wide Displays also available with touch as an option