

24" IP Monitor PoE Power and Data



FEATURES

- 24-Inch Screen Size / 1920 x 1080 FHD Resolution
- Support Max. 5MP IP Camera / Embedded Linux
- Support PoE Power and Data
- Interface: HDMI/ DVI/ VGA/ RJ45/ Audio/ USB2.0 Ports
- Onvif Profile S Compliant, Real-Time Streaming Protocol
- H.264 / H.265 Compression Format
- Metal Chassis
- TAA Compliance / 3-Year Warranty


IP24BD-OK-400T

SPECIFICATIONS	
Size	24 In
Resolution	1920 x 1080
Display Area (mm)	527.04 (H) x 294.16 (V)
Aspect Ratio	16 : 9
Response Time	5ms
Viewing Angle	178° / 178°
Brightness	250cd/m ²
Contrast Ratio	3000 : 1
Color	16.7 M
Backlight	LED
Interface	RJ45 x1, HDMI x1, DVI x1, VGA x1, USB2.0 x2, Audio In (RCA) x2, Earphone Out x1
Speaker	2x built-in speaker (2 Watt)
Support Split Viewing	1/2/4/6/8/9/10/16CH
IP Video Support	16x (2592x1944)/ 8x (2592x1944)/ 4x (2592x1944)
Support Decode	H.264/H.265
Onvif	Yes / Onvif Profile S
Cabinet Material	Metal Housing
Cabinet Color	Black
POE Input DC range	36VDC to 57VDC (Complies with IEEE802.3at IEEE802.3at/4-Pairs)
Power Consumption	Approx. 27W
POE Power Required	IEEE 802.3bt Type 3 (POE++ 60W)
Electrical Rating	12V DC/5A (AC 100V~240V, 50/60Hz)
Operating Temp.	32° F ~ 122° F (0° C ~ 50° C)
Storage Temp.	-4° F ~ 140° F (-20° C ~ 60° C)
Humidity	10% ~ 80%
Dimensions (In/mm)	22.67 x 13.69 x 2.53 / 585.56 x 353.09 x 79
Net Weight	12.56 Lbs (5.7 Kg)
Certification	CE / FCC
VESA™	100 x 100
Accessories	USB Mouse x1

**Specifications may change without any notice

DIMENSIONS

UNIT:MM

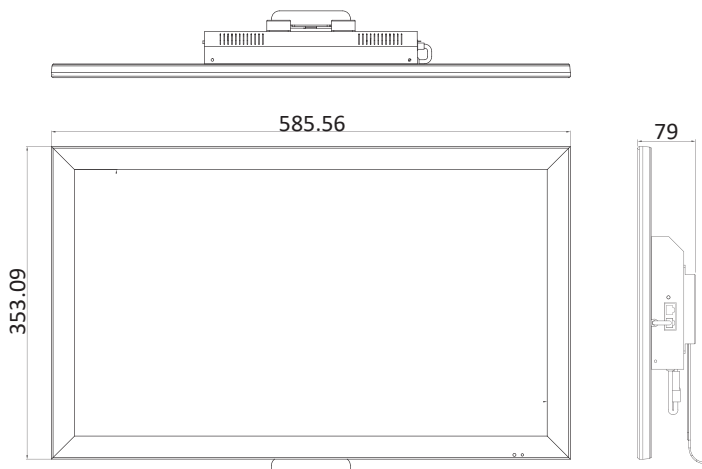

30398 Esperanza,
Rancho Santa Margarita, CA 92688

888-651-9688 / 949-586-3338

sales@gvision-usa.com
https://www.gvision-usa.com

