

# P10PS Series

800x600 Resolution / Resistive Touch or Non-Touch

10.4"

**Model Name:**

- P10PS-JA-400G
- P10PS-JA-452G
- P10PS-JA-453G



## // DESCRIPTIONS

Gvision 10.4-inch Resistive Touchscreen Monitor, meticulously crafted for demanding point-of-sale settings. This cutting-edge display offers an exceptional solution, specifically tailored to accommodate resistive touch functionality, with versatile USB or Serial RS232 input options available for seamless integration. Its robust design ensures optimal performance, even in rugged environments. Experience the perfect synergy of durability and usability with the Gvision P10PS resistive touchscreen monitor.

These monitors are specifically engineered for rugged environments that demand resistive touch capabilities, coupled with the need for commercial-grade monitors to operate continuously, 24/7.

## // KEY FEATURES

- 10.4-Inch Screen Size
- 800 x 600 Resolution
- High-Contrast Color TFT LCD Display
- Compatible with IBM, VGA, and VESA Standards
- Support DDC/1/2B Plug & Play Compatibility
- Rugged & Durable Photo Stand
- TAA Compliant
- 3-Year Warranty



## // SPECIFICATIONS


	P10PS-JA-400G	P10PS-JA-452G	P10PS-JA-453G
<b>DISPLAY</b>			
Size	10.4 In	10.4 In	10.4 In
Resolution	800 x 600	800 x 600	800 x 600
Display Area (mm)	211.2(H) x 158.4(V)	211.2(H) x 158.4(V)	211.2(H) x 158.4(V)
Aspect Ratio	4 : 3	4 : 3	4 : 3
Viewing Angle	160° / 150°	160° / 150°	160° / 150°
Response time	15ms	15ms	15ms
Brightness	230cd/m <sup>2</sup>	250cd/m <sup>2</sup>	230cd/m <sup>2</sup>
Contrast Ratio	500:1	400 : 1	500:1
Color Depth	262K	262K	262K
Backlight	LED	LED	LED
<b>INTERFACE</b>			
Ports	VGA x1, Audio x1	VGA x1, RS232 x1, Audio x1	VGA x1, USB x1, Audio x1
<b>TOUCH</b>			
Type / Point	N/A	Resistive / 5-Wire	Resistive / 5-Wire
Interface	N/A	RS232	USB
<b>FEATURES</b>			
Support OS	N/A	Windows / Linux / Android	Windows / Linux / Android
<b>AUDIO</b>			
Speakers	1W / Per Channel Driver	1W / Per Channel Driver	1W / Per Channel Driver
<b>CABINET</b>			
Color/Material	Black / Plastic	Black / Plastic	Black / Plastic
<b>POWER</b>			
Consumption/Rating	24W/ DC12V 2A (100~240V,50~60Hz)	24W/ DC12V 2A (100~240V,50~60Hz)	24W/ DC12V 2A (100~240V,50~60Hz)
<b>TEMPERATURE</b>			
Operating / Storage	32°F ~ 104°F (0°C ~ 40°C) / -4°F ~ 104°F (-20°C ~ 40°C)		
<b>DIMENSIONS (WxHxD)</b>			
Inch / Millimeter	10.9 x 9.5 x 1.6 / 278 x 242 x 43	10.9 x 9.5 x 1.6 / 278 x 242 x 43	10.9 x 9.5 x 1.6 / 278 x 242 x 43
<b>WEIGHT</b>			
Net Weight	3.6 lbs (1.64kg)	3.6 lbs (1.64kg)	3.6 lbs (1.64kg)
<b>VESA™</b>			
Mount Size (mm)	75 x 75	75 x 75	75 x 75

## // OPTIONS

COLOR OPTIONS	
P10PS-OA-153G	White is also available

## // DIMENSIONS

Unit: mm

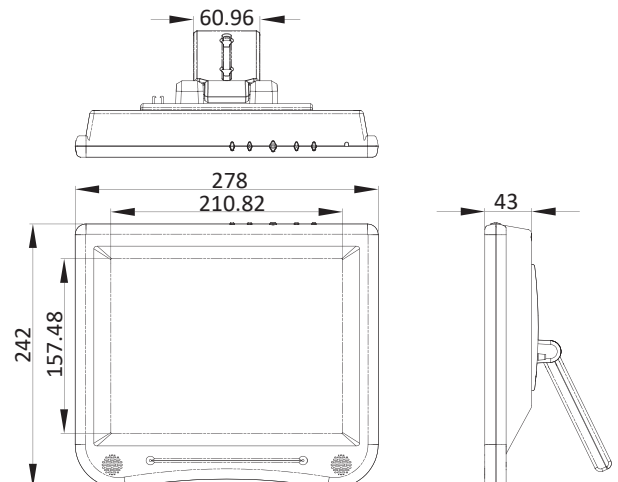

Note: Panel and specifications subject to change without notice.