

10.1" IP PVM PoE Power and Data Monitor




FEATURES

- 10.1-Inch Screen Size / 1280 x 800 Resolution
- Interface: CVBS Out/ HDMI In/ SD Slot/ RJ45 (PoE)
- PoE Standard IEEE802.3at, PoE Output Power & Data
- Motion Sensor for Auto Switch/ On screen Warning Message on/off
- Warning Beep when Motion Detected and Beep when Losing Image
- IP Camera (1080p)/ Simultaneously Loop out via IP & CVBS
- 24/7 Operation Design
- 3-Year Warranty

****Optional PoE and Terminal Block**

DIMENSIONS

UNIT:MM

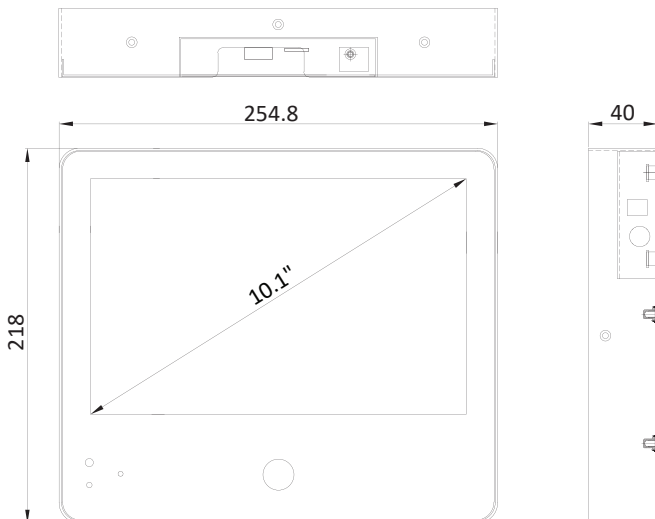

PVM10ZJ-OC4-4

SPECIFICATIONS	
Size	10.1 In
Resolution	1280 x 800
Aspect Ratio	16 : 10
Response Time	15ms
Viewing Angle	160° / 160°
Brightness	300cd/m ²
Contrast Ratio	1000 : 1
Color	16.7M
Backlight	LED
Interface	CVBS Out x1, HDMI x1, SD Slot x1, RJ45 (PoE)
3D Noise Reduction	Yes
Multi Languages	Yes
Camera Sensor	1/3" Sony CMOS
Resolution	1080P@25fps
Video Output	RJ45, CVBS
Min. Illumination	0.1 Lux (Color), 0.01Lux (B/W)
Compression	H-264, MJPEG
Compliance	Onvif v2.2
Lens	3.6mm Fixed lens
Recording	Micro SD, Remote FTP, TCP/UDP CMS, RTSP SD Card: 128GB recording 5 days/ 256GB recording 12 days
Network Protocol	HTTP, TCP/IP, UDP/IP, RTSP, FTP, DHCP, NTP, PPPoE, NTP. Unicast and Multicast supported
SD Card Max. Resolution	576I@30fps
Max. Support Volume	32GB
Max. Stream	15Mbit/s
Supporting Format	AVI, MOV, MP4, 3GP, MPG, VOB, DAT, WMV, ASF, JPEG, BMP, MP3, WMA
Cabinet Material/Color	Metal/Black
Power Consumption	18W/ Or POE:IEEE 802.3at Less than 18W
Electrical Ratings	DC12V/1.4A (AC 100V ~ 240V, 50/60Hz)
Operating Temp.	32° F ~ 122° F (0° C ~ 50° C)
Storage Temp.	-4° F ~ 140° F (-20° C ~ 60° C)
Humidity	10% ~ 85%
Dimensions (In/mm)	10.03 x 8.58 x 1.57 / 254.8 x 218.0 x 40.0
Net Weight	4.62 Lbs (2.1 Kg)
Certification	UL / FCC / CE / RoHS
VESA™	75 x 75
Accessories	AC adapter, Remote control, User's manual

****Specifications may change without any notice**

30398 Esperanza,
Rancho Santa Margarita, CA 92688

888-651-9688 / 949-586-3338

sales@gvision-usa.com
https://www.gvision-usa.com

